

Software Update (CN33)

This document contains instructions for updating the system software of the CN33 digital piano. Please read these instructions thoroughly before attempting to perform the software update.

1. Prepare the USB memory device

Copy the **CN33_040.SYS** update file to the root folder of a USB memory device.

* The USB device should be formatted to the "FAT" or "FAT32" filesystem.



2. Connect the USB memory device


While the instrument is turned off:

Connect the prepared USB memory device to the USB port (on the underside of the main body).

3. Start the update

Press and hold the **REC**, **TRANSPOSE** and **USB** buttons, then turn on the instrument.

The update process will start automatically after a few seconds, with status messages shown in the LCD display.

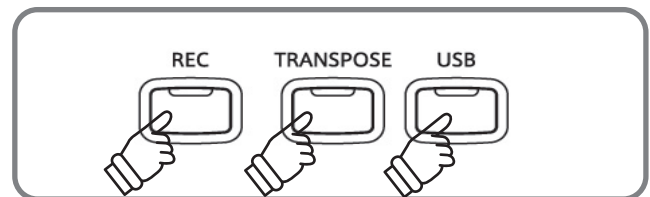

* Do not remove the USB memory device while the software update is in progress.

4. Disconnect the USB memory device

After approximately 30 seconds, the message "end" will be shown in the LCD display, indicating that the software update has been successful.

Disconnect the USB memory device, then turn the instrument off and on. The updated software will be used automatically.

* If the software update is unsuccessful, restart the process from step 1.


* Eventually a RESET need to be done after the update installation. Therefore press and hold the REC and PLAY/STOP buttons, then turn on the instrument. You can release the buttons after a few seconds.

■ Checking the software version

To double check that the software update has been successful, press and hold the **PIANO 2**, **DRAWBAR** and **HARPSI&MALLETS** buttons, then turn on the instrument.

The current software version will be shown in the LCD display after a few seconds.

* Turn the instrument off and on to return to normal operation.

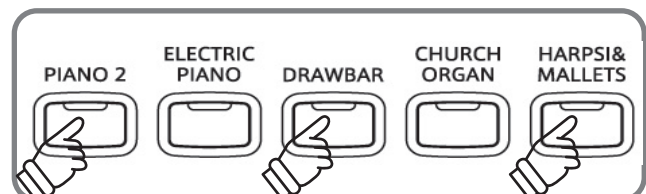

Software Update

■ CN33 software changelog

Version	Release Date	Changes
v1.21	11/2010	Improved String Resonance polyphony assignment.
v1.20	10/2010	Improved touch curve of soft touch range on E.Piano sounds.
v1.13	04/2010	Initial factory release.